





Texturized Polypropylene



## PROPERTY

## DESCRIPTION

Primary Yarn Polymer	Polypropylene
Yarn Cross Section	Texturized Polyethylene
Standard Color	Sand
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual Layered Woven Polypropylene
Coating Type	SilverBack™ Polyurethane
Perforations	No
Texturized Polypropylene Denier/Ends	4600/8
Recommended Infill	2-3 lbs. Silica Sand
Pile Height	1 "
Pile Weight	36 oz.

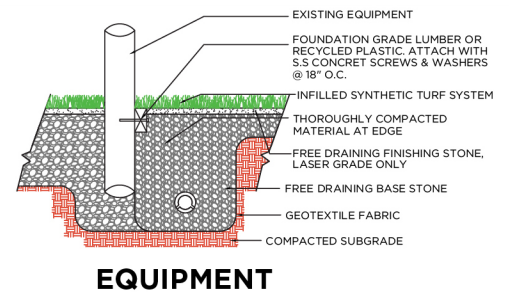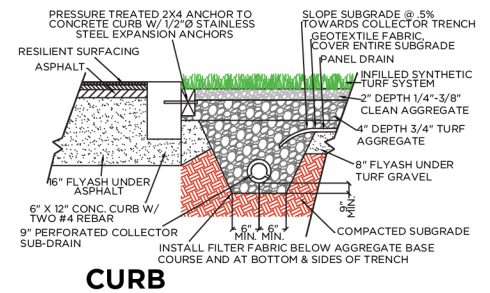

## APPLICATION

This is the premium bunker turf product. This product looks and feels like a real sand trap. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.

**TESTING**
**BUNKER TURF PL914**

<b>FINISHED FABRIC</b>	<b>ENGLISH</b>	<b>SYSTEM</b>	<b>METRIC</b>	<b>SYSTEM</b>	<b>ASTM TEST</b>
<b>Nominal Specification</b>	<b>Value</b>	<b>Units</b>	<b>Value</b>	<b>Units</b>	<b>Method</b>
<b>Pile Height (Nominal)</b>	1.125	In.	28.58	mm.	D-5823
<b>Face Weight</b>	36	oz/yd	1,221	g/m	D-5848
<b>Total Fabric Weight</b>	65	oz/yd	2,204	g/m	D-5848
<b>Primary Backing Weight</b>	7.4	oz/yd	251	g/m	D-5848
<b>Secondary Coating Weight</b>	20	oz/yd	678	g/m	D-5848
<b>Tuft Bind</b>	>8	lbs.	>3.6	kg.	D-1335
<b>Grab Tear Strength (Average)</b>	>200	lbs.	>91	kg.	D-2256
<b>Lead Content</b>	<50	ppm	<50	ppm	D-2765
<b>Total Yarn Linear Density</b>	4,600	Denier	5,112	D-TEX	D-1577
<b>Stitch Rate</b>	21	Per 3"	27.51	Per 10 cm	D-5793
<b>Machine Gauge</b>	3/8	In.	.95	cm	D-5793
<b>Flammability</b>	TEST	PASSED	TEST	PASSED	D-2859
<b>Water Permeability w/Infill</b>	>30	In/hr	>76	cm/hr	F-1551
<b>Fabric Width</b>	15	Ft.	4.6	M	None

