
One Putt



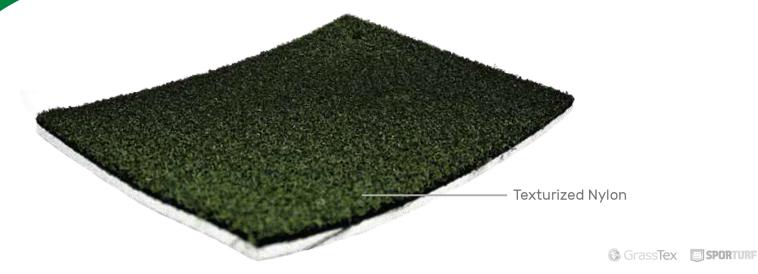

PROPERTY

DESCRIPTION

Primary/Stalk Yarn Polymer Nylon

Yarn Cross Section Texturized Nylon

Standard Color Forest Green

UV Stabilized Yes

Fabric Construction Tufted

Primary Backing Dual Layered Woven Polypropylene

Coating Type 5mm Polyurethane Foam


Perforations No


Polypropylene Yarn Denier/Ends 4400/8

Recommended Infill N/A

Pile Height %"

Pile Weight 25 oz.





APPLICATION

The Multicolored yarn used in this product provides an authentic look that is hard to find. This product performs best with sand infill and is designed to hold short chip shots while providing a true roll. This product can be installed outdoors or indoors on a compacted aggregate base or over concrete.



TESTING One Putt

| FINISHED FABRIC | ENGLISH | SYSTEM | METRIC | SYSTEM | ASTM TEST |
|------------------------------|---------|--------|--------|-----------|------------------|
| Nominal Specification | Value | Units | Value | Units | Method |
| Pile Height (Nominal) | .25 | In. | 6.35 | mm. | D-5823 |
| Face Weight | 25 | oz/yd | 848 | g/m | D-5848 |
| Total Fabric Weight | 107 | oz/yd | 3,628 | g/m | D-5848 |
| Primary Backing Weight | 7 | oz/yd | 237 | g/m | D-5848 |
| Secondary Coating Weight | 75 | oz/yd | 2543 | g/m | D-5848 |
| Grab Tear Strength (Average) | >200 | lbs. | >91 | kg. | D-2256 |
| Lead Content | <50 | ppm | <50 | ppm | D-2765 |
| Total Yarn Linear Density | 4,400 | Denier | 4,889 | D-Tex | D-1577 |
| Stitch Rate | 21 | Per 3" | 27.51 | Per 10 cm | D-5793 |
| Machine Gauge | 3/16" | ln. | .95 | cm | D-5793 |
| Flammability | TEST | PASSED | TEST | PASSED | D-2859 |
| Water Permeability w/Infill | >30 | ln/hr | >76 | cm/hr | F-1551 |
| Fabric Width | 12 | Ft. | 3.6 | М | None |
| | | | | | |

