



Range Turf II

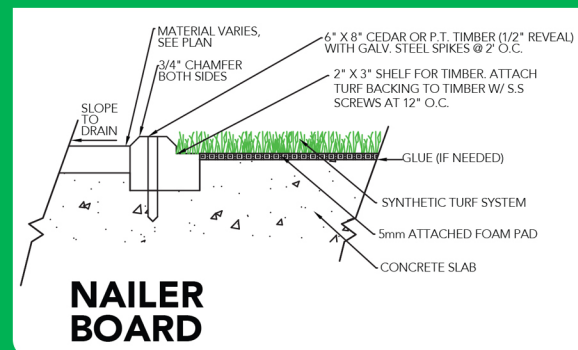

PROPERTY	DESCRIPTION
Primary Yarn Polymer	Polypropylene
Yarn Cross Section	Texturized Polypropylene
Standard Colors	Pine
UV Stabilized	Yes
Fabric Construction	Tufted
Primary Backing	Dual layered woven polypropylene
Coating Type(s)	SilverBack™ Polyurethane
Perforations	No
Texturized Polypropylene Denier/Ends (Thatch)	6500/8
Recommended Infill	N/A
Pile Height	1 1/8"
Total Weight	147 oz.
Fabric Weight	12 & 15 Ft.

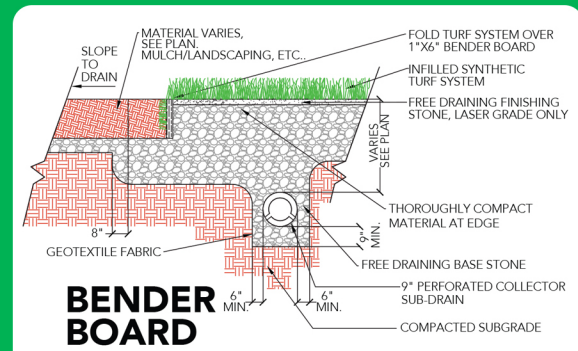

APPLICATION

This is a non-infilled high grade polypropylene yarn system designed for heavy traffic tee lines, hitting mats, and extended use golfers. This product is used by many of the top golf courses in the U.S. This product holds a real tee and allows players to hit all clubs, from wedge to driver. This product does not replace real grass, it is an alternative to use to give grass time to heal properly. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.

TESTING
Range Turf II

CHARACTERISTIC	VALUE	TEST
Linear Density (Denier)	6500 polypropylene	ASTM D 1577
Yarn Thickness	100 Microns	ASTM D 3218
Tensile Strength	16 N	ASTM D 2256
Pile Weight*	120 oz./yd ²	ASTM D 5848
Finished Pile Height*	1 3/8"	ASTM D 5823
Product Weight (total)*	149 oz./yd ²	ASTM D 3218
Primary Backing Weight*	7.4 oz./yd ²	ASTM D 2256
Secondary coating Weight**	22 oz./yd ²	ASTM D 5848
Fabric Width	12' & 15'	ASTM D 5793
Tuft Gauge	1/4"	ASTM D 5793
Grab Tear Strength	200-1b-F	ASTM D 5034
Tuft Bind	>10-1b-F	ASTM D 1335
Infill (Sand)	N/A	None

